

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179766

Luminaire Tested: **LDA6A55835D010TE LARH40FL 6LAL1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P179766
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26680)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A55835D010TE LARH40FL 6LAL1LI
Description: PORTFOLIO 6" Lensed Adjustable, Self-flanged, 40° Flood
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5150.0 lumens
Efficiency: N/A
Efficacy: 84.4 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 61
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P179766

CATALOG NUMBER: LDA6A55835D010TE LARH40FL 6LAL1LI

Luminous Intensity Polar Plot

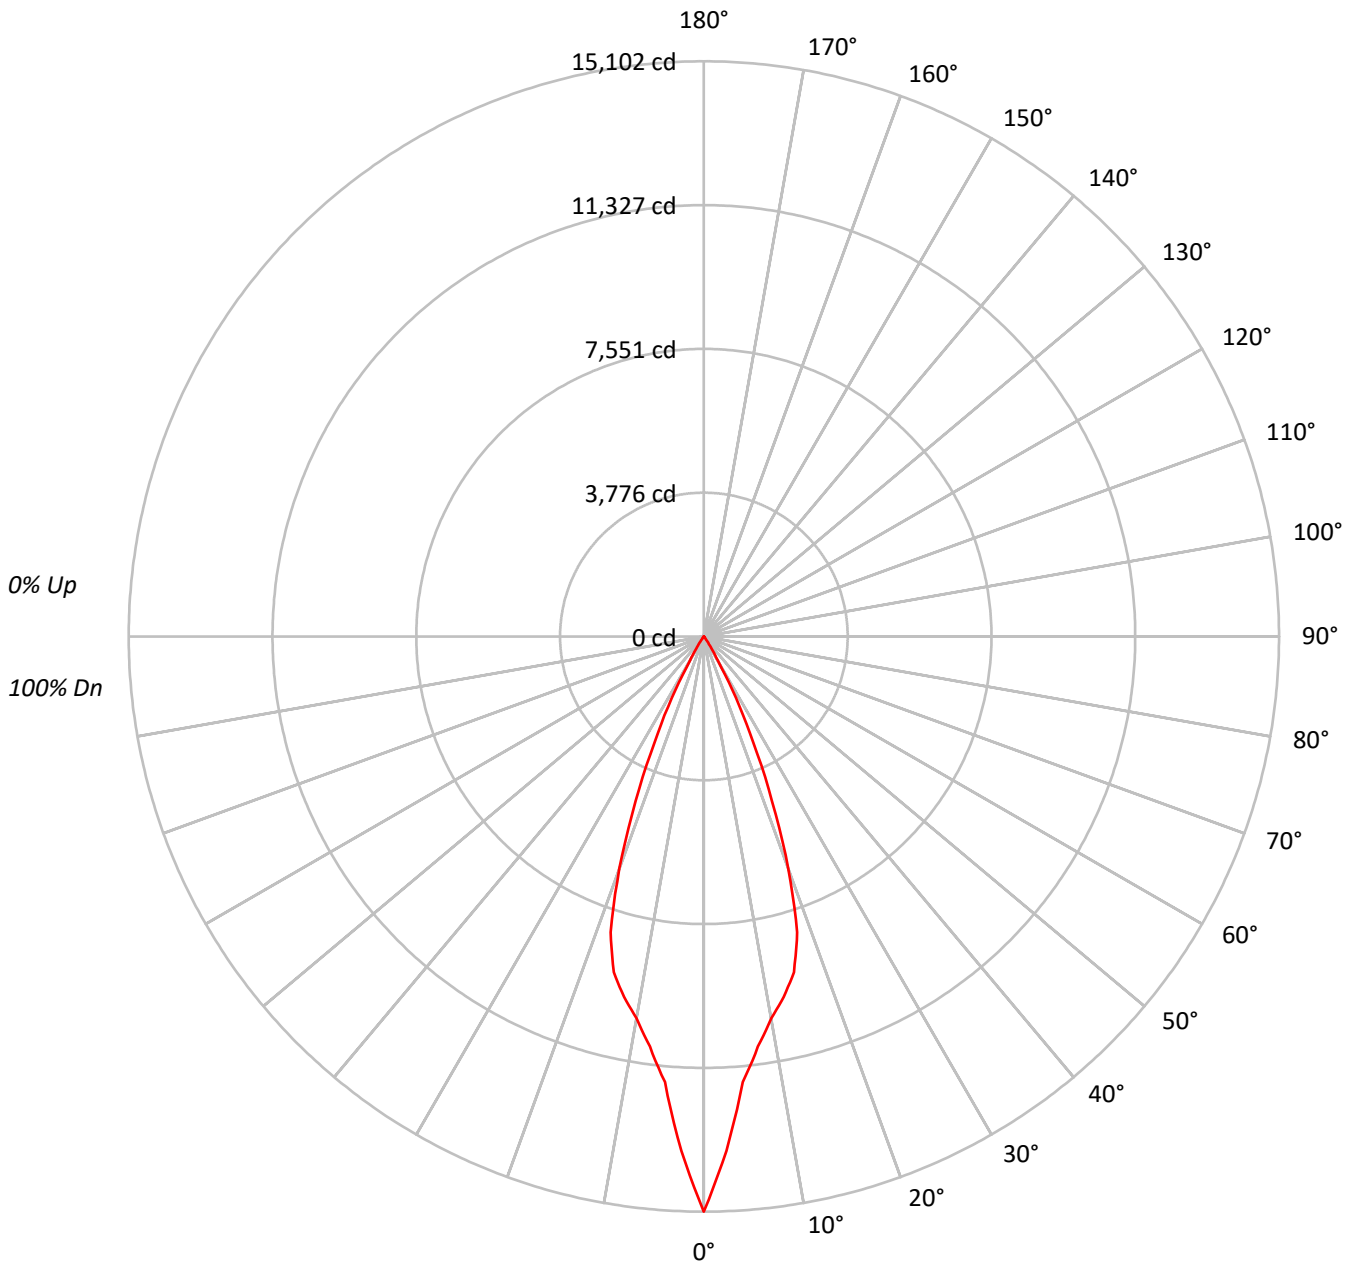



TEST NUMBER: P179766

CATALOG NUMBER: LDA6A55835D010TE LARH40FL 6LAL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96			
2	110	107	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			
3	106	101	97	94	105	100	96	94	98	95	92	95	93	91	93	91	89	88			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			
5	99	93	88	85	98	92	87	84	90	86	84	88	85	83	87	84	82	81			
6	96	89	84	81	94	88	84	80	87	83	80	85	82	79	84	81	79	78			
7	92	85	80	77	91	85	80	77	83	79	77	82	79	76	81	78	76	75			
8	89	82	77	74	88	81	77	74	80	76	74	79	76	73	79	75	73	72			
9	86	79	74	71	85	78	74	71	78	74	71	77	73	71	76	73	70	69			
10	83	76	71	68	83	76	71	68	75	71	68	74	71	68	74	70	68	67			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	827905
5°	646399
10°	566873
15°	518079
20°	378424
25°	184656
30°	45070
35°	10306
40°	2218
45°	1008
50°	512
55°	765
60°	767
65°	649
70°	481
75°	424
80°	316
85°	0



TEST NUMBER: P179766

CATALOG NUMBER: LDA6A55835D010TE LARH40FL 6LAL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1088.3	21.1
10°-20°	2451.4	47.6
20°-30°	1444.1	28.0
30°-40°	140.9	2.7
40°-50°	11.3	0.2
50°-60°	6.4	0.1
60°-70°	4.9	0.1
70°-80°	2.4	0.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4983.7	96.8
0°-40°	5124.6	99.5
0°-60°	5142.3	99.9
0°-90°	5150.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5150.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15102	
5°	11746	###
15°	9128	2451
25°	3053	1444
35°	154	141
45°	13	11
55°	8	6
65°	5	5
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P179766

CATALOG NUMBER: LDA6A55835D010TE LARH40FL 6LAL1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	15102.2
2.5°	13517.3
5°	11746.4
7.5°	10862.4
10°	10183.5
12.5°	9689.5
15°	9128.5
17.5°	8141.6
20°	6486.7
22.5°	4678.8
25°	3052.8
27.5°	1821.9
30°	712.0
32.5°	373.0
35°	154.0
37.5°	51.0
40°	31.0
42.5°	20.0
45°	13.0
47.5°	8.0
50°	6.0
52.5°	7.0
55°	8.0
57.5°	7.0
60°	7.0
62.5°	6.0
65°	5.0
67.5°	4.0
70°	3.0
72.5°	3.0
75°	2.0
77.5°	2.0
80°	1.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)